

Premium Comfort Leather Seat Covers

Front Seat Covers Installation Guide



Video Installation Guide


COVERLAND 

FRONT SEAT COVERS

- Check the Image below and go to the page that matches your vehicle seat type.


Seat Style A

Ordinary Front Seat
Go to **4p**

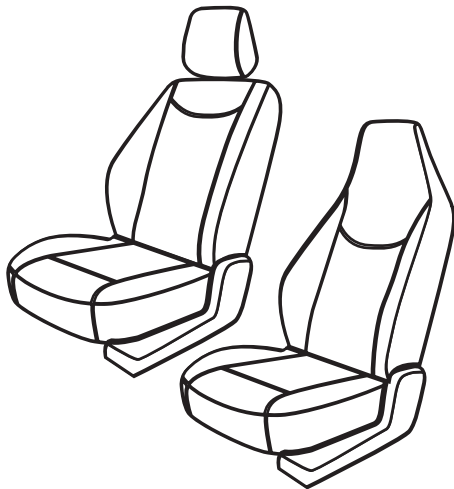


Seat Style B

Front Seat with Armrest
Go to **8p**

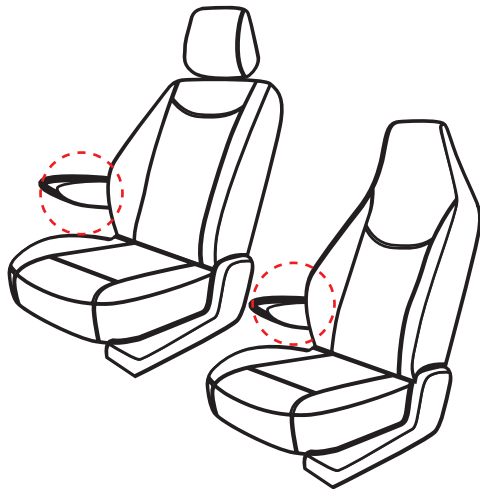


Seat Style C

Front Seat with Shoulder Seat Belt Hold
Go to **12p**

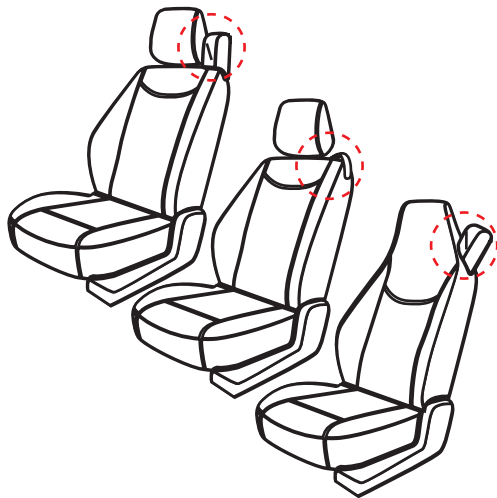


Seat Style D

Front Seat with Shoulder Seat Belt Hold
and Armrest
Go to **16p**

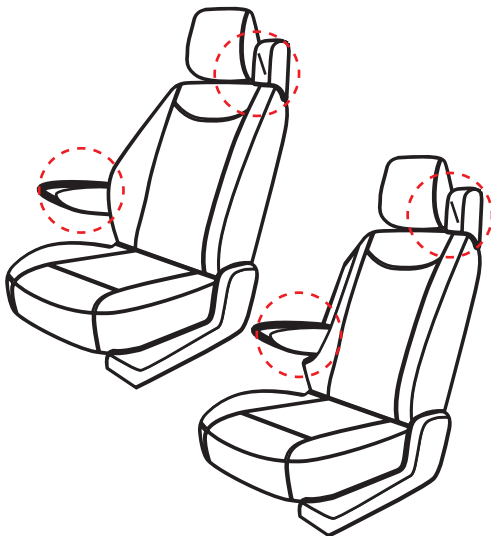

FRONT SEAT COVERS

Seat Style A

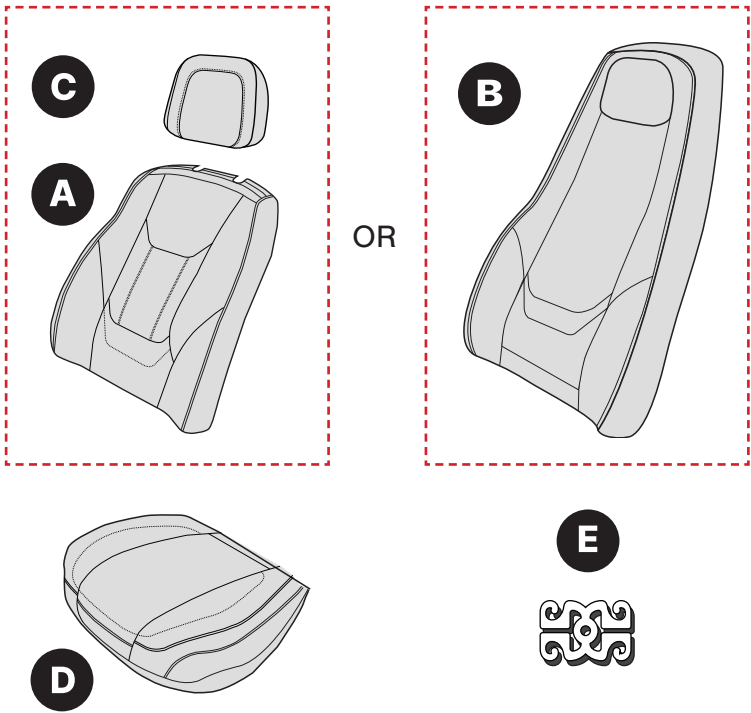


Parts	Parts Name	Quantity
A OR B	Seat Back Cover	2 pcs
C	Headrest Cover	0 to 2 pcs
D	Seat Cushion Cover	2 pcs
E	Chuck	8 to 10 pcs


FRONT SEAT COVERS

• Front Seat Cover Installation

◇ Seat Style A

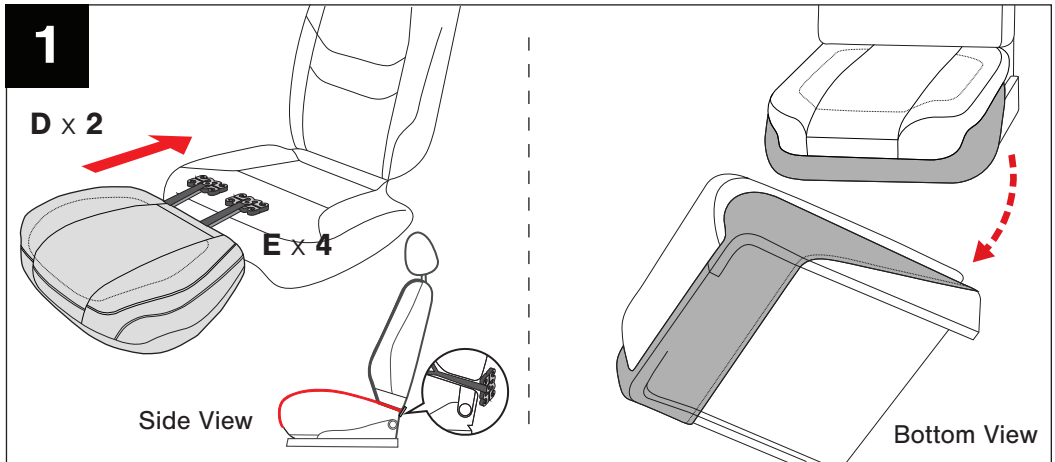


- Place the Seat Cushion Cover (D) over the seat, aligning it properly.
- Insert both straps that Connected Chuck (E) through the gap between the Seat Back and the Cushion.
- Secure the seat cover using the Chuck (E).
- Pull the front elastic hem to cover and secure the plastic trim.

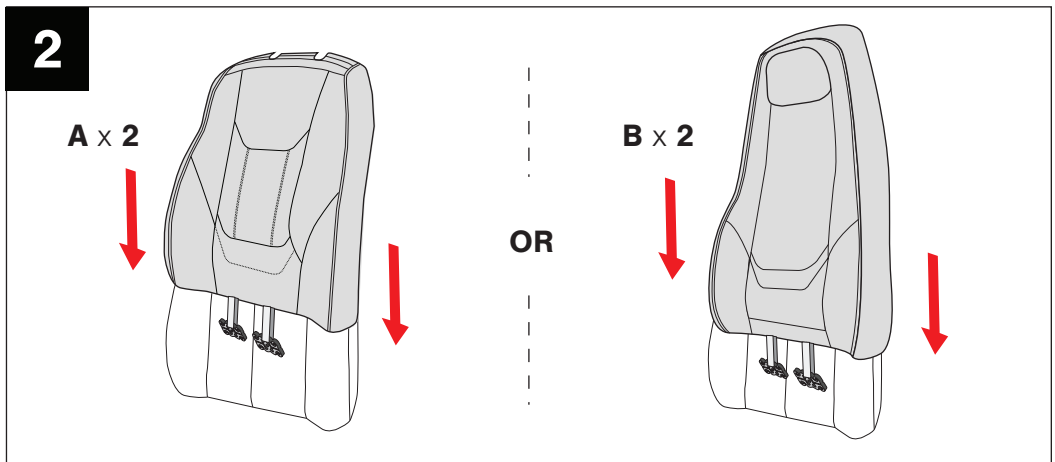


- Unfold and slide the Seat Back Cover(A or B) over the Seat back with both hands.

FRONT SEAT COVERS

• Front Seat Cover Installation

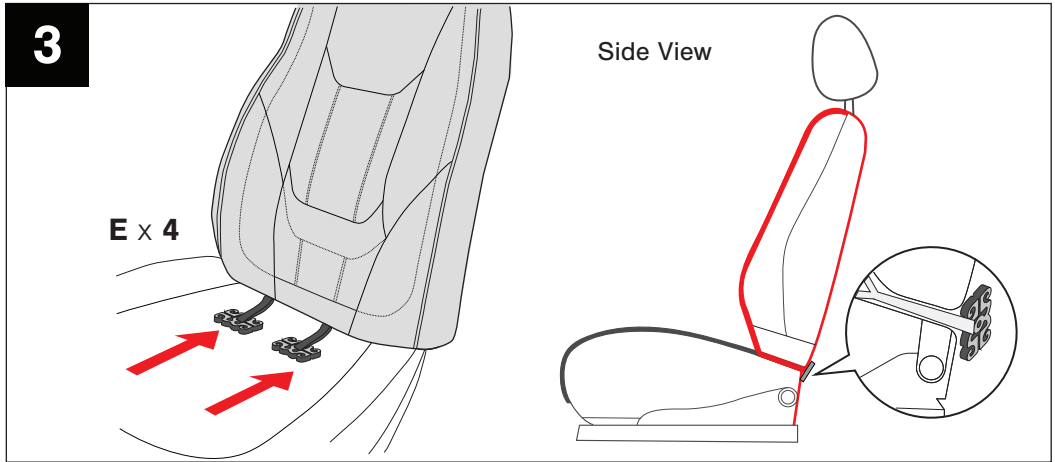


- Insert both straps with Chucks (E) through the gap between the Seat Back and the Seat Cushion.
- Secure the cover using the Chucks.

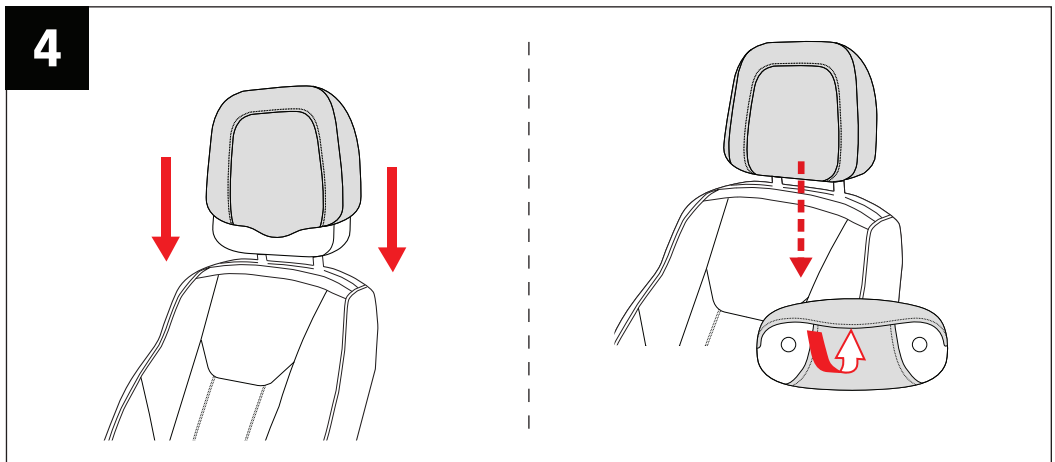

- * For seats with separate headrests and seat backs, please proceed with Head Rest Cover Install
- Unfold and slide it over the Headrest Cover (C).
 - Secure the headrest by closing the lower Velcro inward.

FRONT SEAT COVERS

Seat Style B

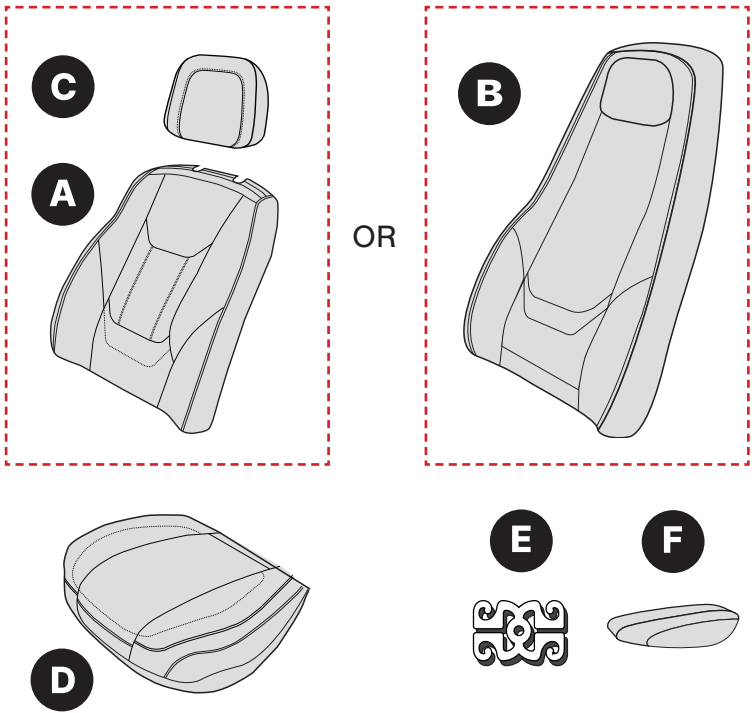


Parts	Parts Name	Quantity
A OR B	Seat Back Cover	2 pcs
C	Headrest Cover	0 to 2 pcs
D	Seat Cushion Cover	2 pcs
E	Chuck	8 to 10 pcs
F	Armrest Cover	4 pcs


FRONT SEAT COVERS

• Front Seat Cover Installation

◇ Seat Style B

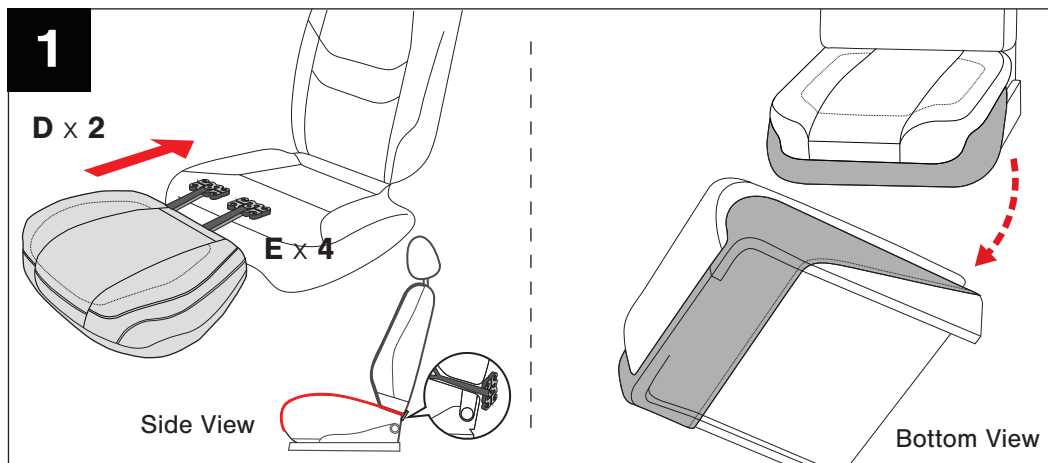


- Place the Seat Cushion Cover (D) over the seat, aligning it properly.
- Insert both straps that Connected Chuck (E) through the gap between the Seat Back and the Cushion.
- Secure the seat cover using the Chuck (E).
- Pull the front elastic hem to cover and secure the plastic trim.

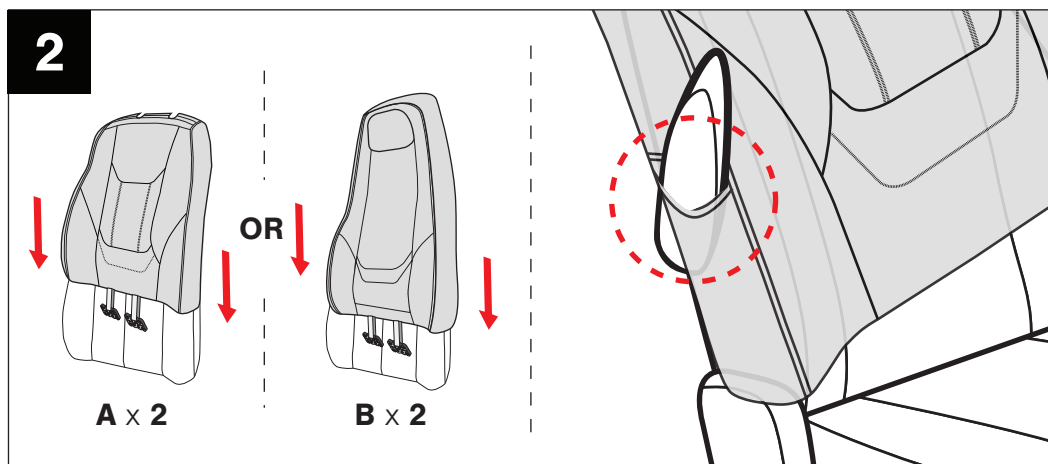


- Unfold and slide the Seat Back Cover(A or B) over the Seat back with both hands.
- While pulling down the cover, carefully insert the armrest into the armrest hole on the side.

FRONT SEAT COVERS

• Front Seat Cover Installation


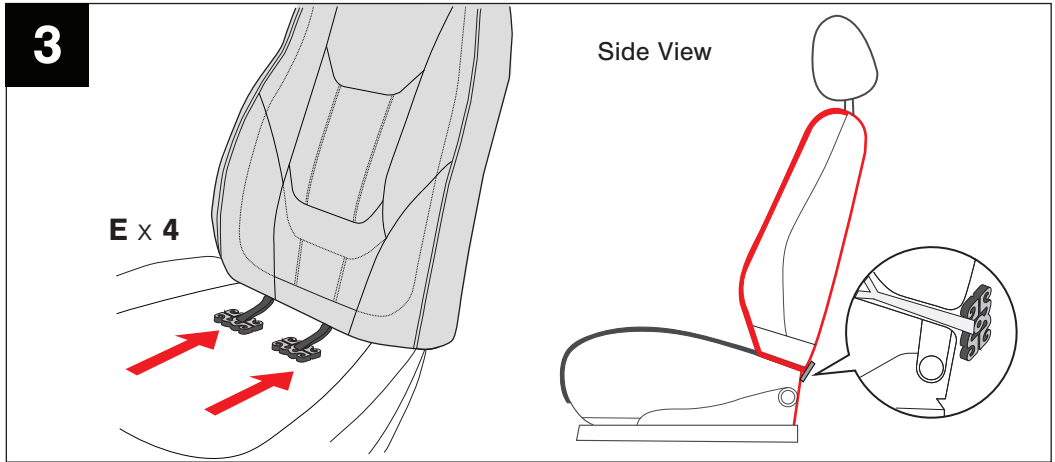


- Insert both straps with Chucks (E) through the gap between the Seat Back and the Seat Cushion.
- Secure the cover using the Chucks.

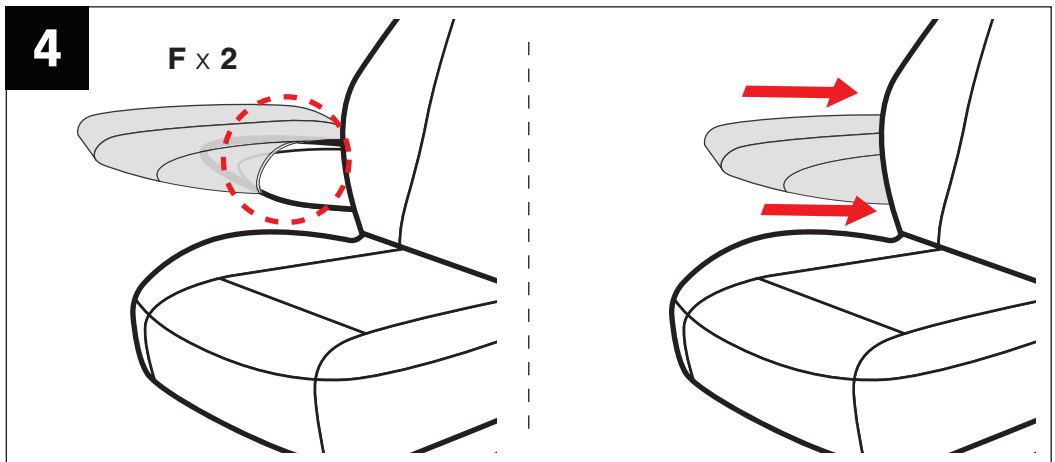

- Open the side hole of the Armrest Cover (F) and insert the front part of the armrest first.
- Using both hands, pull the the Armrest Cover (F) toward the back until it's fully covered, then adjust it for a neat fit.


5

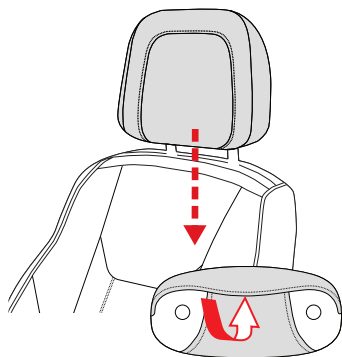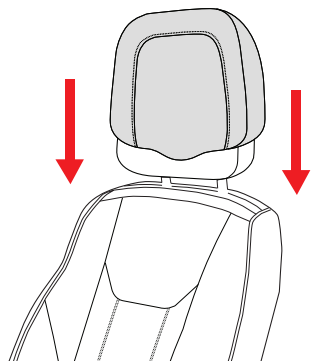

- * For seats with separate headrests and seat backs, please proceed with Head Rest Cover Install
- Unfold and slide it over the Headrest Cover (C).
 - Secure the headrest by closing the lower Velcro inward.

FRONT SEAT COVERS

Seat Style C

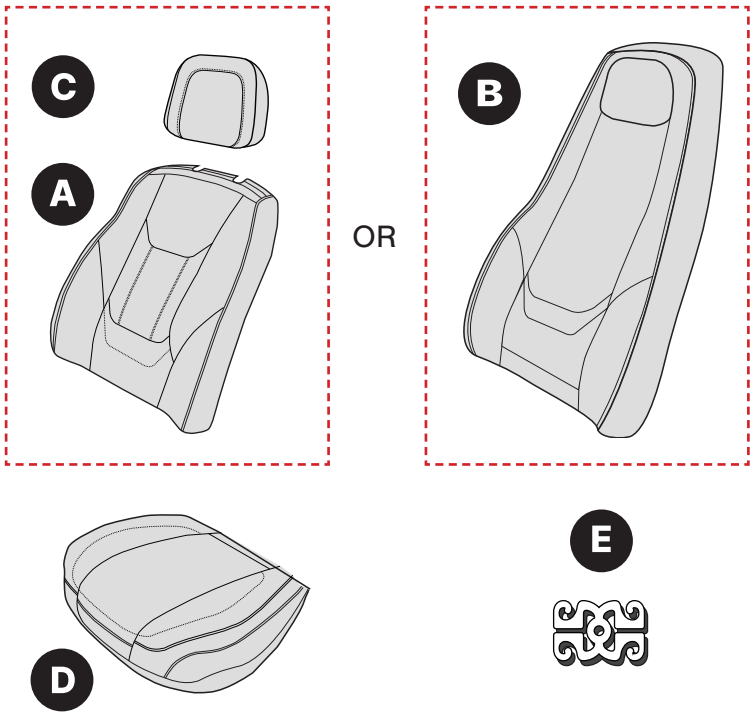


Parts	Parts Name	Quantity
A OR B	Seat Back Cover	2 pcs
C	Headrest Cover	0 to 2 pcs
D	Seat Cushion Cover	2 pcs
E	Chuck	8 to 10 pcs


FRONT SEAT COVERS

• Front Seat Cover Installation

◇ Seat Style C

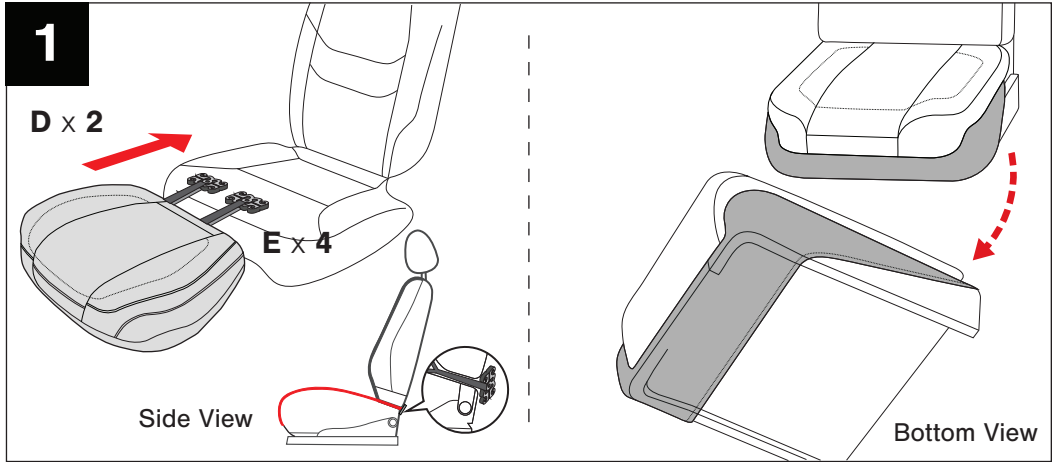


- Place the Seat Cushion Cover (D) over the seat, aligning it properly.
- Insert both straps that Connected Chuck (E) through the gap between the Seat Back and the Cushion.
- Secure the seat cover using the Chuck (E).
- Pull the front elastic hem to cover and secure the plastic trim.

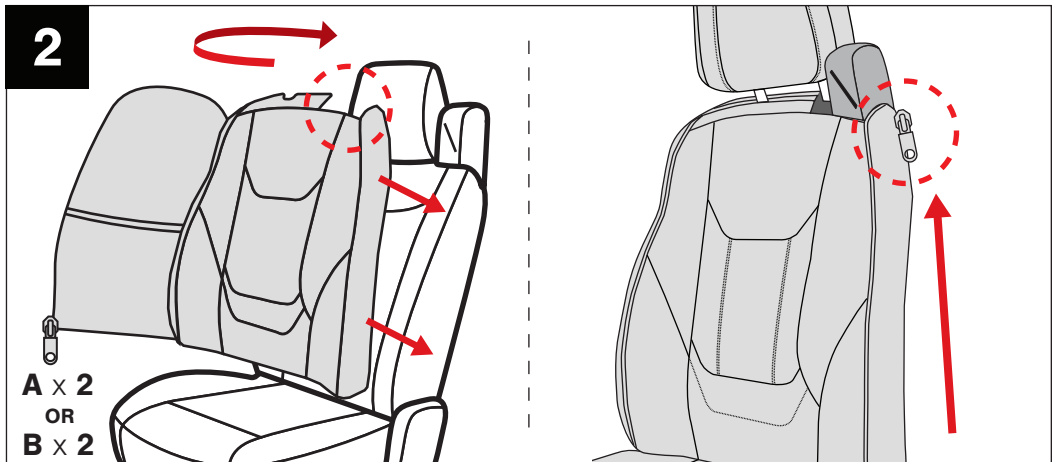


- Unfold the Seat Back Cover (A or B), align the hole with the Shoulder Seat Belt Hold attached to the seat, and wrap the cover around the seat. Please ensure you have the correct side, as there is a left and right distinction.
- Align the zipper lines on both ends of the cover, insert them, zip up, and make any necessary adjustments so the cover sits properly in place.

FRONT SEAT COVERS

• Front Seat Cover Installation

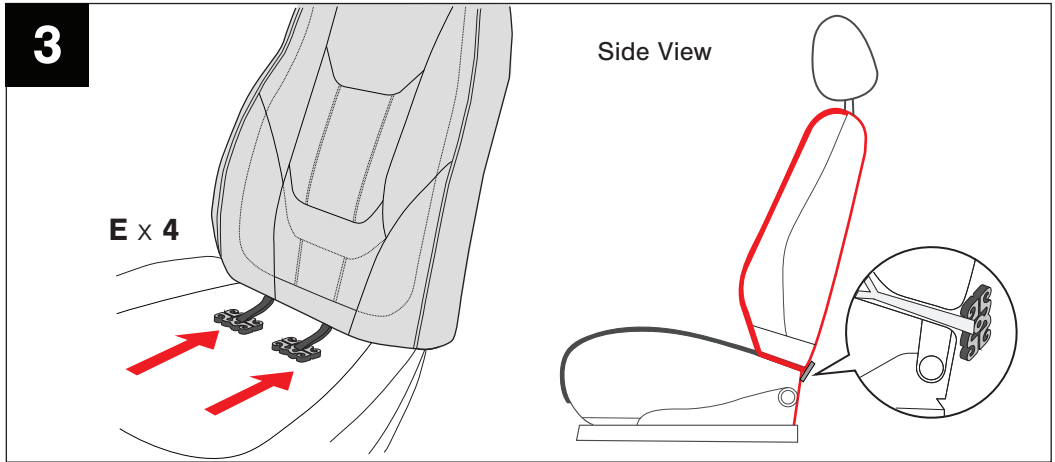


- Insert both straps with Chucks (E) through the gap between the Seat Back and the Seat Cushion.
- Secure the cover using the Chucks.

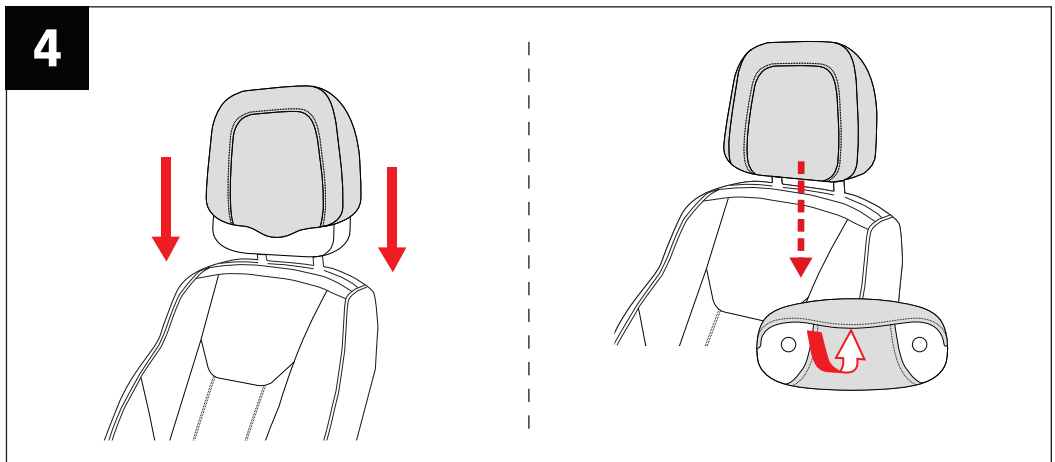

- * For seats with separate headrests and seat backs, please proceed with Head Rest Cover Install
- Unfold and slide it over the Headrest Cover (C).
 - Secure the headrest by closing the lower Velcro inward.

FRONT SEAT COVERS

Seat Style D

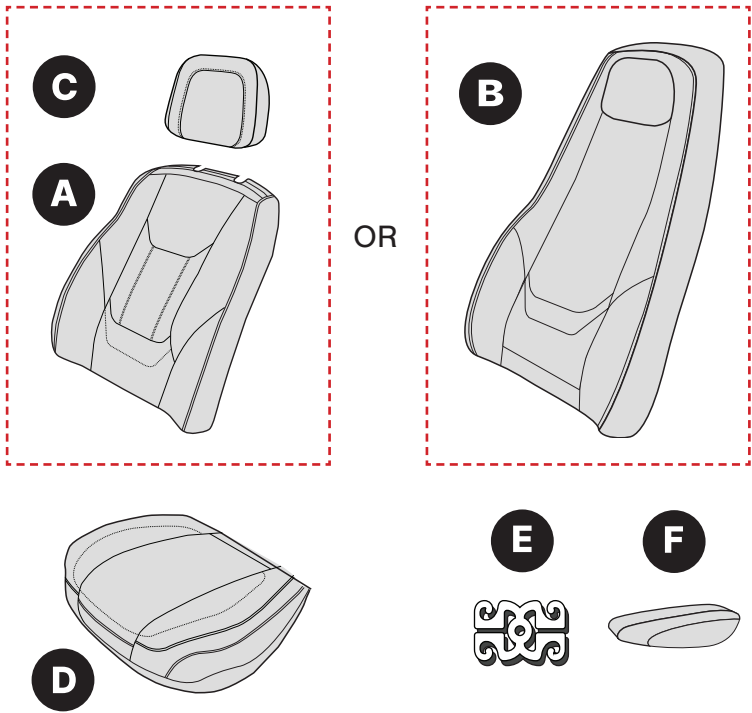


Parts	Parts Name	Quantity
A OR B	Seat Back Cover	2 pcs
C	Headrest Cover	0 to 2 pcs
D	Seat Cushion Cover	2 pcs
E	Chuck	8 to 10 pcs
F	Armrest Cover	4 pcs


FRONT SEAT COVERS

• Front Seat Cover Installation

◇ Seat Style D

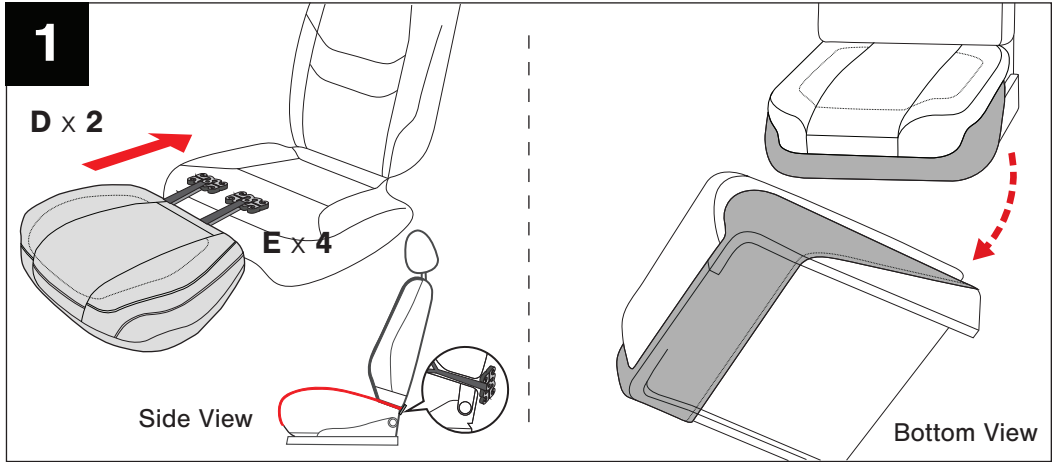


- Place the Seat Cushion Cover (D) over the seat, aligning it properly.
- Insert both straps that Connected Chuck (E) through the gap between the Seat Back and the Cushion.
- Secure the seat cover using the Chuck (E).
- Pull the front elastic hem to cover and secure the plastic trim.

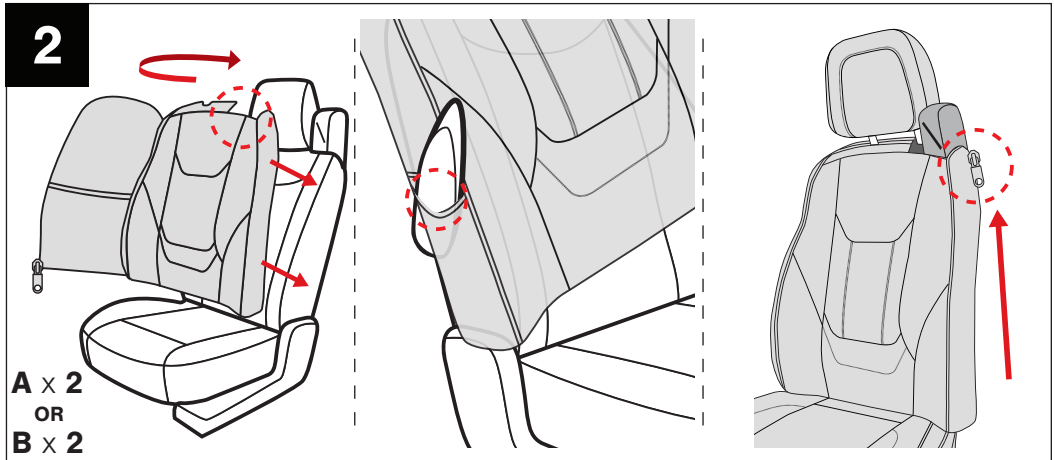


- Unfold the Seat Back Cover (A or B), align the hole with the Shoulder Seat Belt Hold attached to the seat, and wrap the cover around the seat. Please ensure you have the correct side, as there is a left and right distinction.
- Carefully insert the armrest into the armrest hole on the side.
- Align the zipper lines on both ends of the cover, insert them, zip up, and make any necessary adjustments so the cover sits properly in place.

FRONT SEAT COVERS

• Front Seat Cover Installation


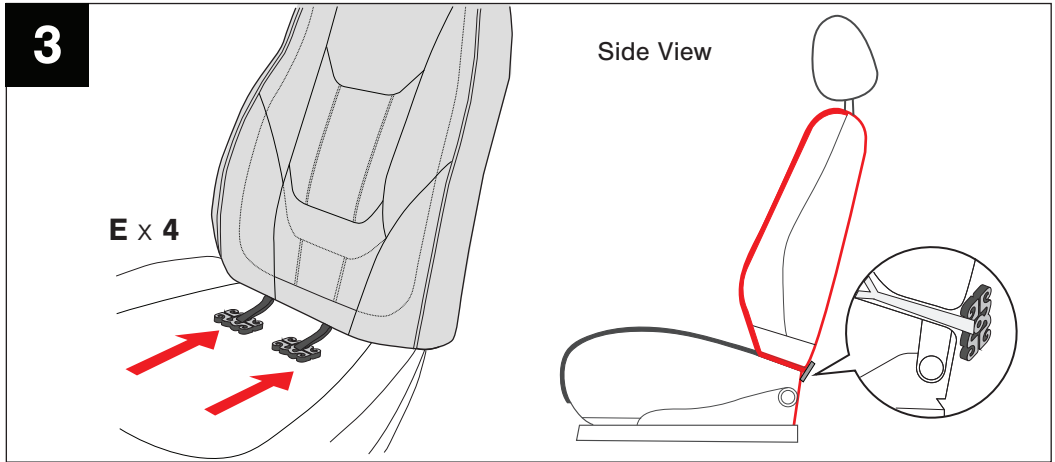


- Insert both straps with Chucks (E) through the gap between the Seat Back and the Seat Cushion.
- Secure the cover using the Chucks.

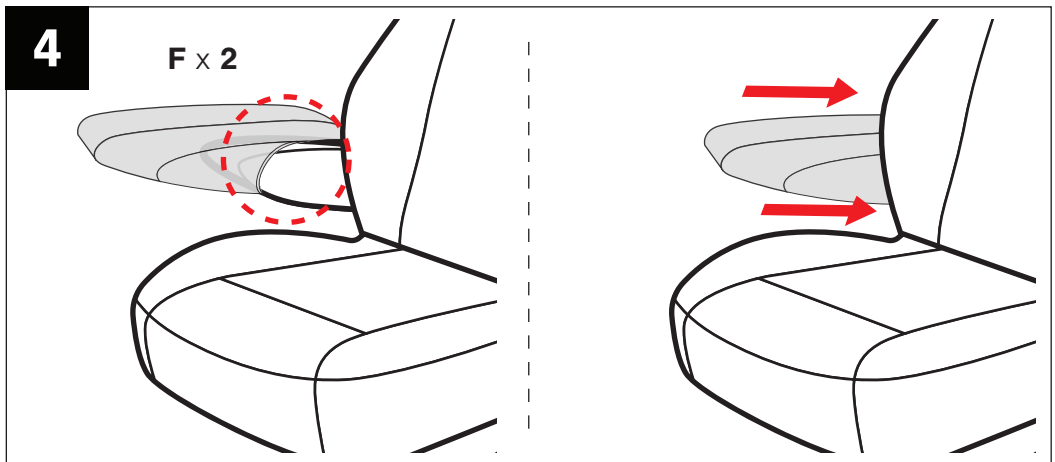

- Open the side hole of the Armrest Cover (F) and insert the front part of the armrest first.
- Using both hands, pull the the Armrest Cover (F) toward the back until it's fully covered, then adjust it for a neat fit.

5

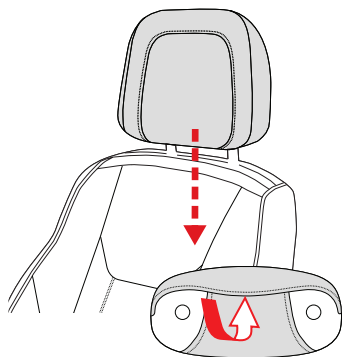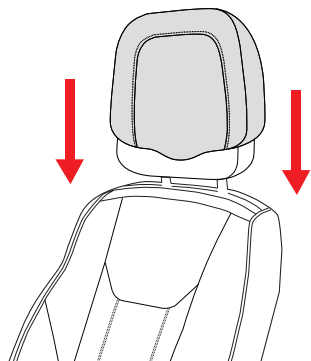

- * For seats with separate headrests and seat backs, please proceed with Head Rest Cover Install
- Unfold and slide it over the Headrest Cover (C).
 - Secure the headrest by closing the lower Velcro inward.


Premium Comfort Leather Seat Covers Video Installation Guide



https://www.youtube.com/playlist?list=PL_H4E-ginvwRubTtw8bFmwLQ0s6w2N3Vr

Premium Comfort Leather Seat Covers


Rear Seat Covers Installation Guide

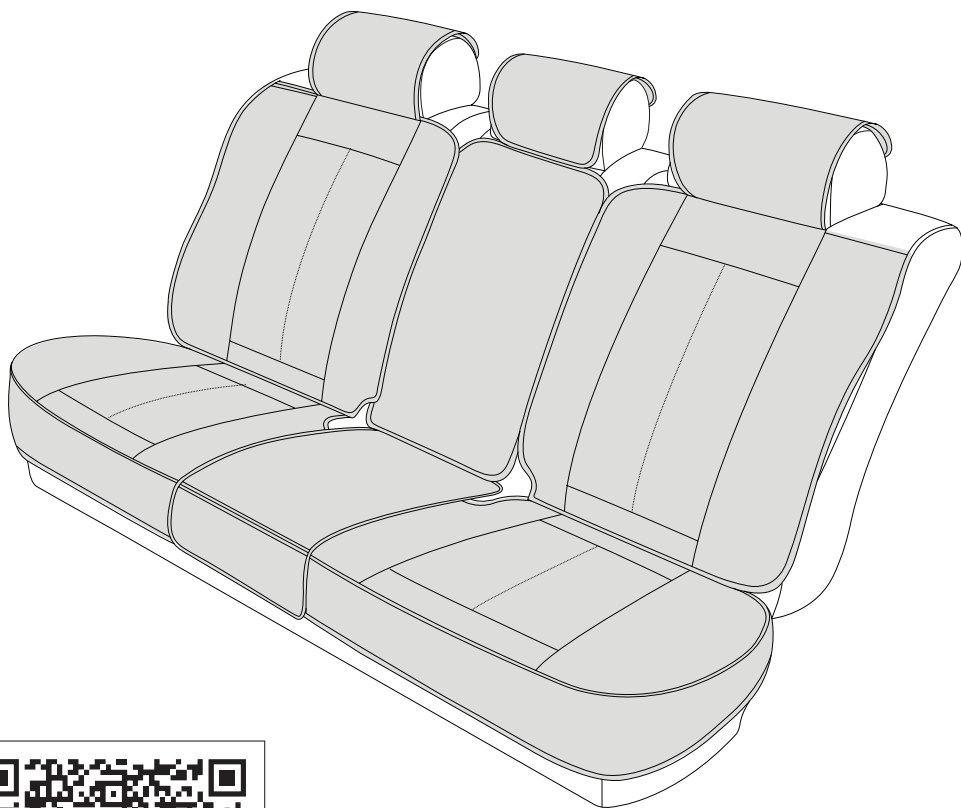

Video Installation Guide

COVERLAND 

REAR SEAT COVERS

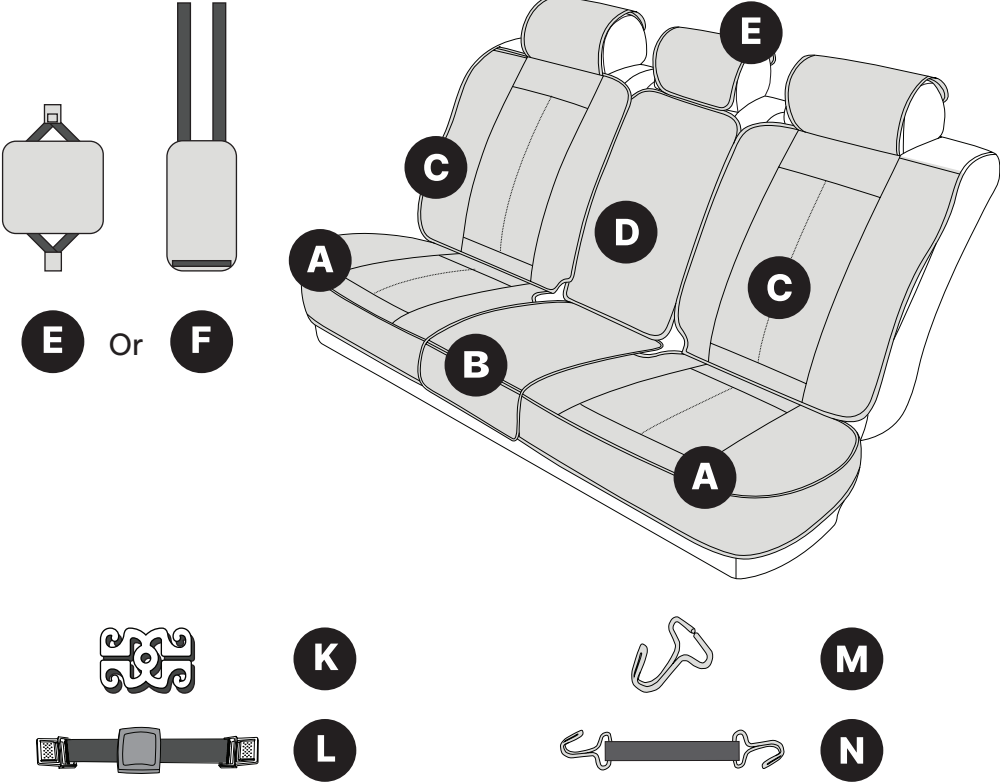


Parts	Parts Name	Quantity
A	Seat Cushion Cover	2 pcs
B	Seat Cushion Middle Cover	1 pcs
C	Seat Back Cover	2 pcs
D	Seat Back Middle Cover	1 pcs
E F	Headrest Middle Cover	1 pcs
K	Chuck	20 to 22 pcs
L	Elastic Buckle	1 pcs
M	Hook	11 to 13 pcs
N	Elastic Hook	5 pcs

REAR SEAT COVERS

- Check the Image below and go to the page that matches your vehicle seat type.


Seat Style A

Seat Cushion Openable
Go to **4p**

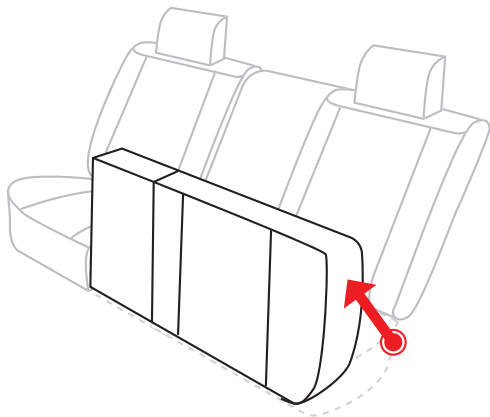


Seat Style B

Seat Cushion Foldable
Go to **4p**

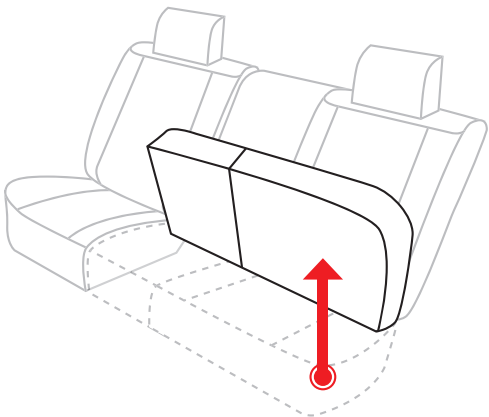


Seat Style C

Seat Back Foldable without Bottom Rail
Go to **6p**

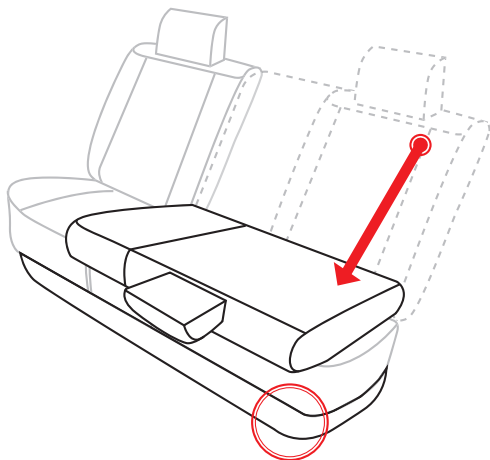

Seat Style D


Seat Back Foldable with Bottom Rail
Go to **8p**

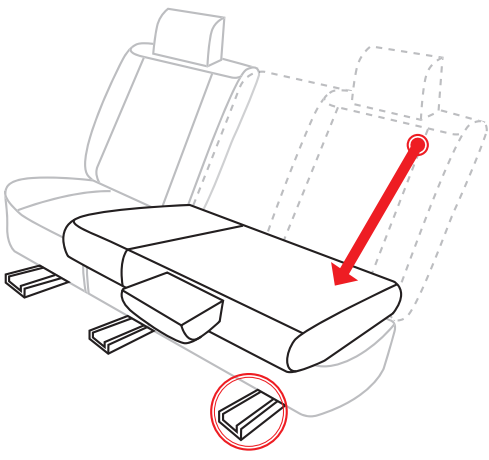


REAR SEAT COVERS

• Seat Cushion Installation

◇ Seat Style A & B

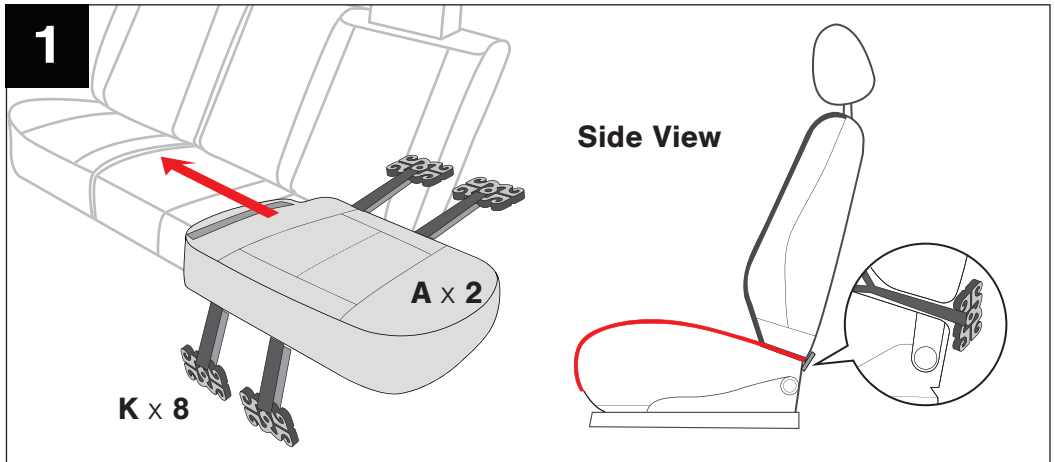


- Attach the Chuck (K) (8 pcs) to the top and bottom elastic bands of the Seat Cushion Cover (A) (2 pcs).
- Place the Seat Cushion Cover (A) at the seat's left and right ends.
- Ensure the left and right sides of the cover are correct.
- Push the top Chuck (K) through the gap between the Seat Back and Seat Cushion.

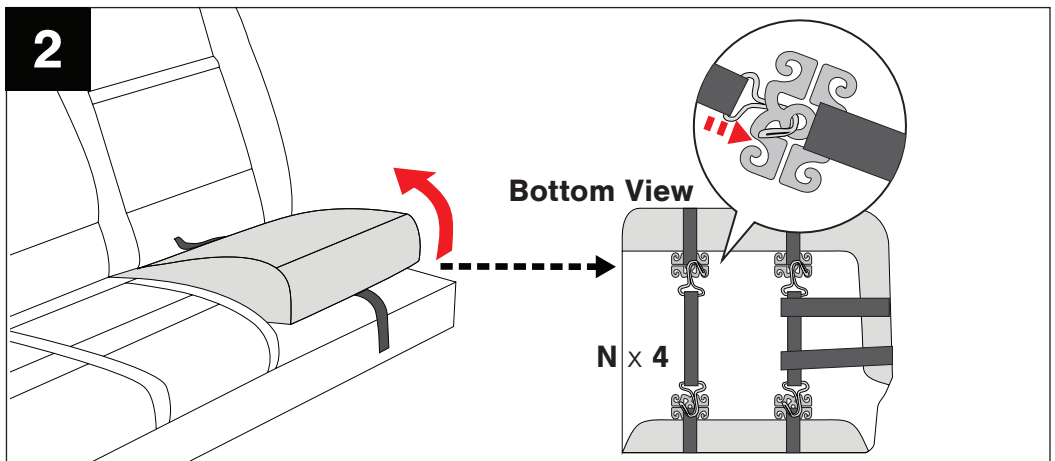


- Lift the Seat Cushion and use the Elastic Hook (N) (4 pcs) to connect the top and bottom Chuck (K).
- Pass the Elastic Hook (N) through the outer elastic band.
- Firmly connect the Elastic Hook (N) to the middle hole of the Chuck (K).

3

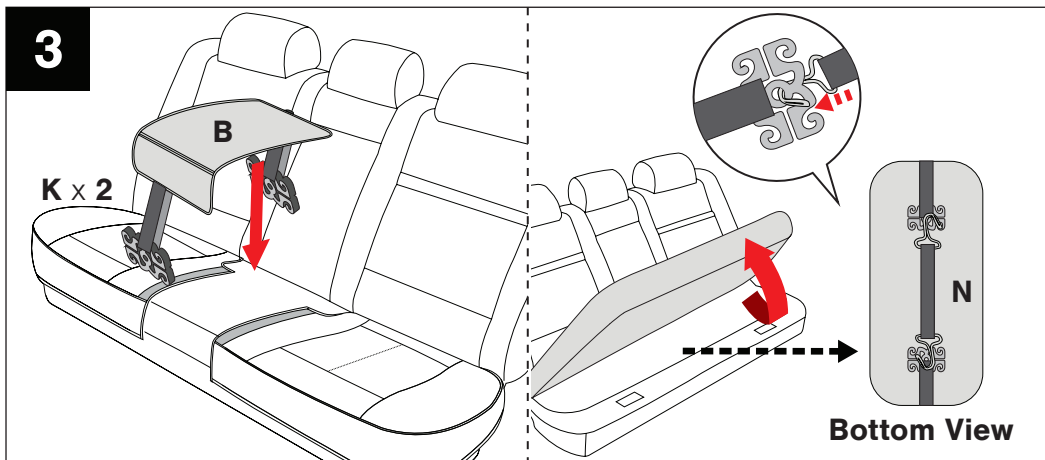

- Attach the Chuck (K) (2 pcs) to the Seat Cushion Middle Cover (B) and center it.
- Ensure correct top and bottom placement. The cut-out corner is for the seat belt.
- Push the top Chuck (K) through the gap between the Seat back and Seat Cushion.
- Lift the Seat Cushion and connect the Elastic Hook (N) to the top and bottom Chucks (K).
- Firmly connect the Elastic Hook (N) to the middle hole of Chuck (K).

4

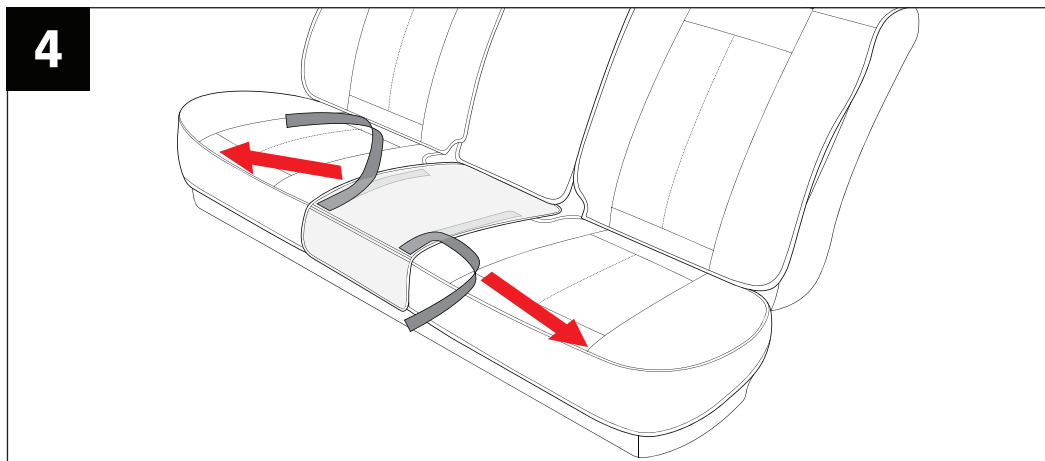

- Adjust the position of the Seat Cushion Middle Cover (B) and remove the velcro cover between the Seat Cushion Covers (A).
- Press to connect the Seat Cushion Middle Cover (B) with the Seat Cushion Covers (A).


Go to 10p




REAR SEAT COVERS

• Seat Cushion Installation


◇ Seat Style C

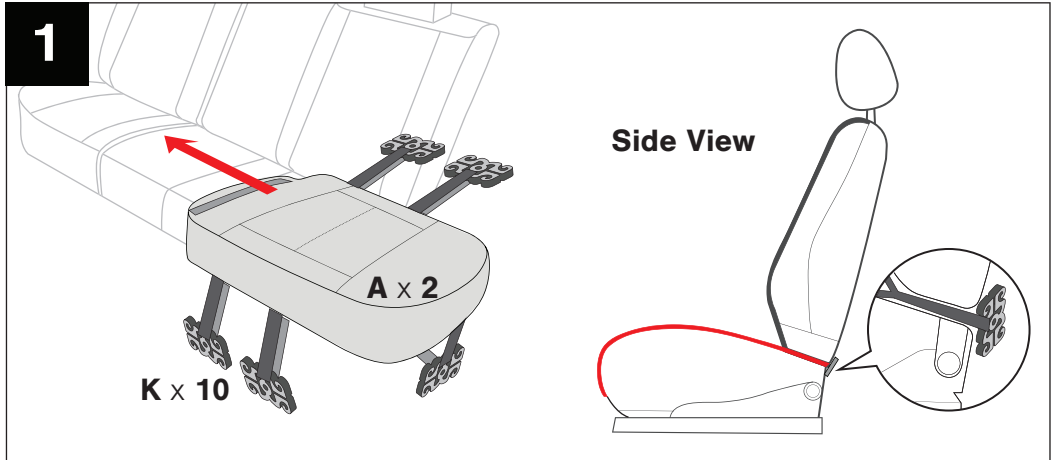


- Attach the Chuck (K) (10 pcs) to the top, bottom and side elastic bands of the Seat Cushion Cover (A) (2 pcs).
- Place the Seat Cushion Cover (A) at the seat's left and right ends.
- Ensure the left and right sides of the cover are correct.
- Push the top Chuck (K) through the gap between the Seat Back and Seat Cushion.

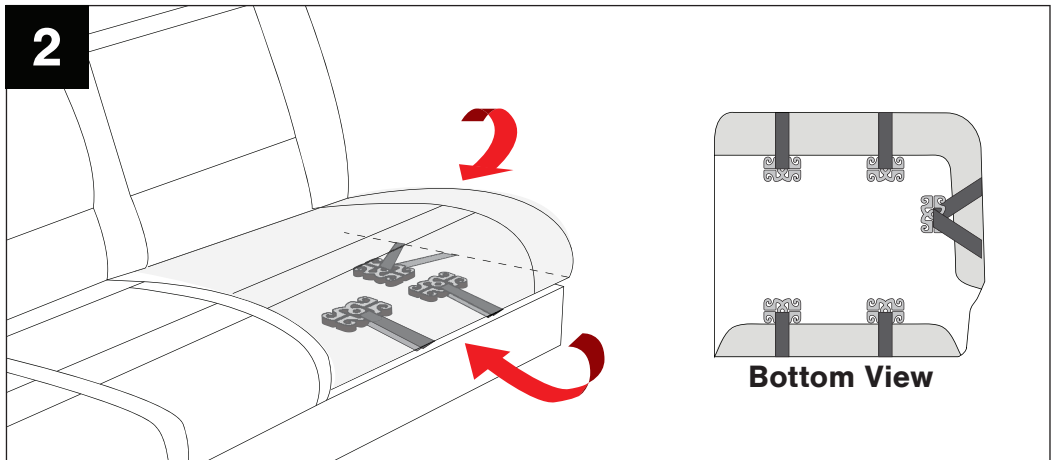

- Insert each Chuck (K) deeply between the Seat Cushion and Seat base.
- Use the chuck's hook shape to secure it firmly.

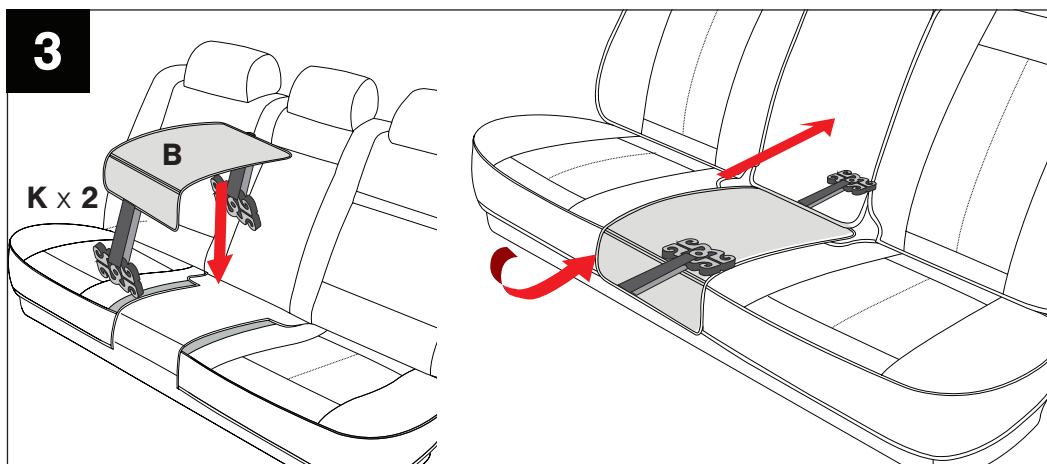3

- Attach the Chuck (K) (2 pcs) to the Seat Cushion Middle Cover (B) and center it on the Seat Cushion.
- Ensure correct top and bottom placement. The cut-out corner is for the seat belt.
- Push the top Chuck (K) through the gap between the Seat Back and Seat Cushion.
- Insert each Chuck (K) deeply between the Seat Cushion and Seat Base.
- Use the chuck's hook shape to secure it firmly.

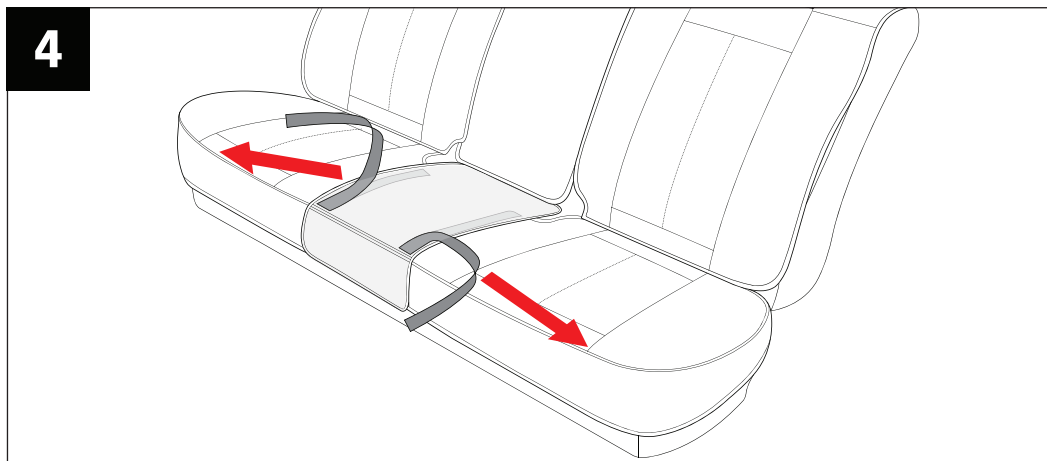4


- Adjust the position of the Seat Cushion Middle Cover (B) and remove the velcro cover between the Seat Cushion Covers (A).
- Press to connect the Seat Cushion Middle Cover (B) with the Seat Cushion Covers (A).

Go to 10p


REAR SEAT COVERS

• Seat Cushion Installation

◇ Seat Style D

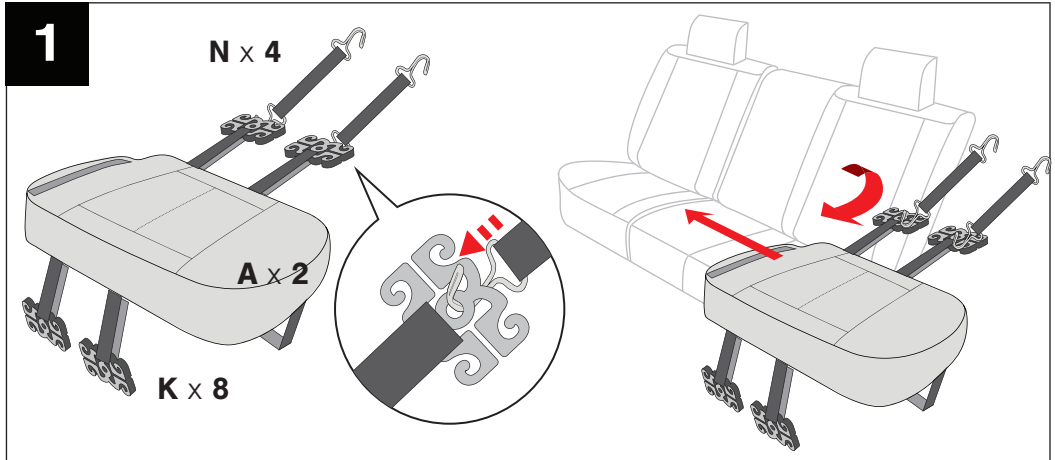


- Attach the Chuck (K) (8 pcs) to the top and bottom elastic bands of the Seat Cushion Cover (A) (2 pcs).
- Connect the Elastic Hook (N) (4 pcs) to the top Chuck (K).
- Place the Seat Cushion Cover (A) at the seat's left and right ends.
- Ensure the left and right sides of the cover are correct.
- Insert the connected (N) & (K) to the gap of the Seat Cushion and Seat Back, then push below the seat.

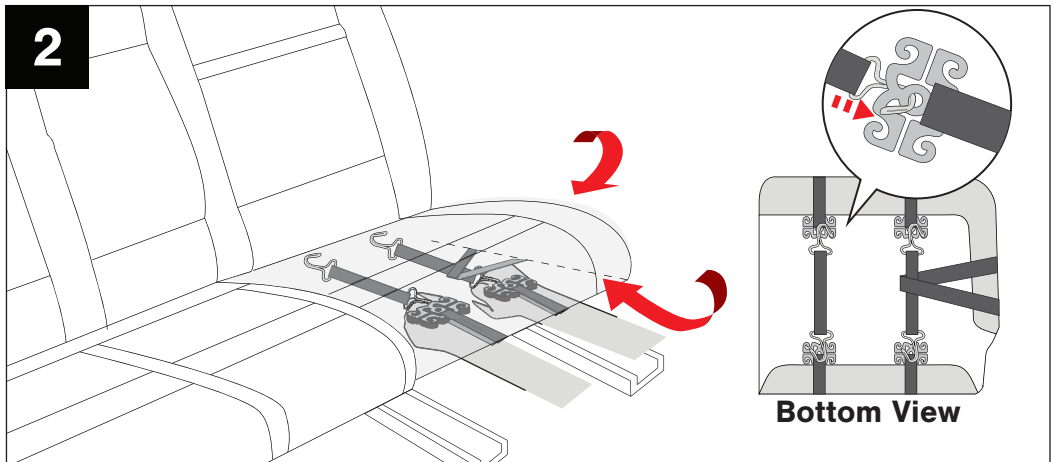


- Check the 'Bottom View' from the image.
- Reach under the seat, pull Elastic Hook (N), and connect it to Bottom Chuck (K).
- Pass the Elastic Hook (N) through the outer elastic band.
- Firmly connect the Elastic Hook (N) to the middle hole of the Chuck (K).

3

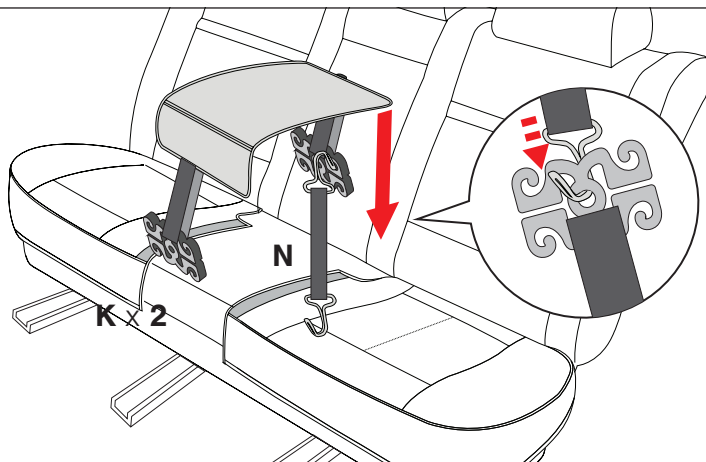

- Attach the Chuck (K) (2 pcs) to the Seat Cushion Middle Cover (B)
- Connect the Elastic Hook (N) to the top Chuck (K).
- Center (B) on the Seat Cushion. The cut-out corner is for the seat belt.
- Insert the connected (N) & (K) through the gap between the Seat Cushion and Seat Back, then push below the seat.

4

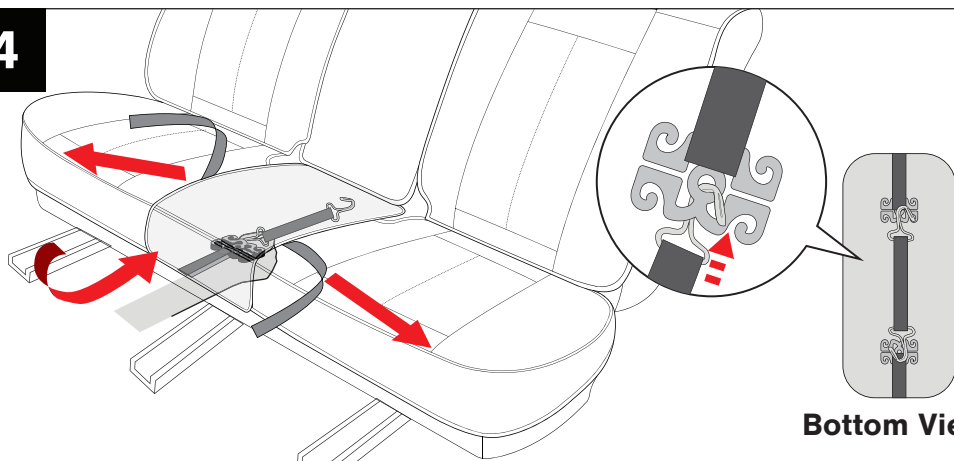

Bottom View

- Reach under the seat, pull Elastic Hook (N), and connect it to Bottom Chuck (K).
- Pass the Elastic Hook (N) through the outer elastic band.
- Firmly connect (N) to the middle hole of the Chuck (K).
- Adjust the position of (B) and remove the velcro cover between the Seat Cushion Covers (A).
- Press to connect the Seat Cushion Middle Cover (B) with the Seat Cushion Covers (A).


Go to 10p



REAR SEAT COVERS

• Seat Back Installation


1

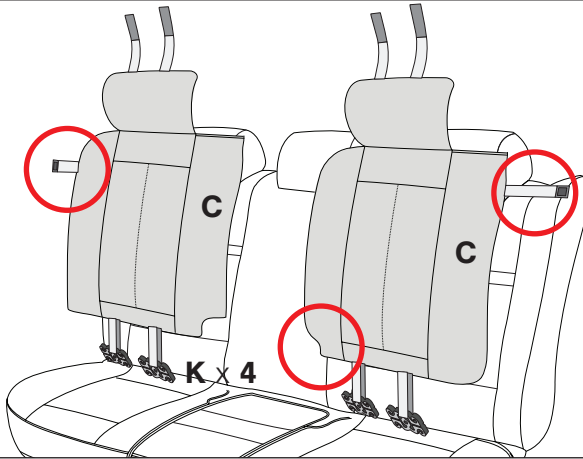

- Position the Seat Back Cover (C) (2 pcs) like image.
- Place side elastic bands outside and the bottom seat belt corner inward.
- Attach Chucks (K) (4 pcs) to the bottom elastic band.


2

Type A

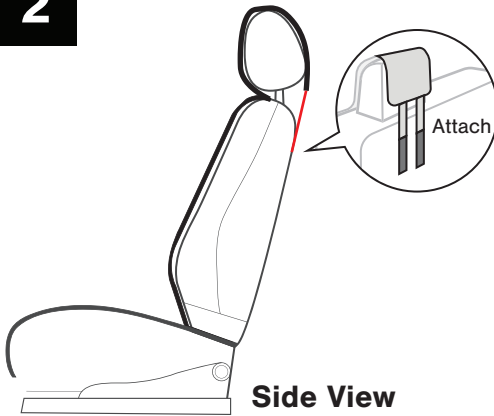

Side View


Type B

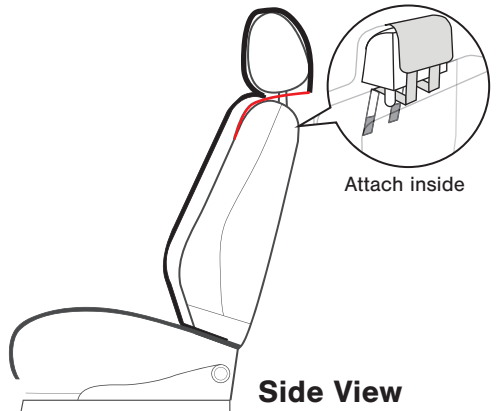


Side View

- Use the top Velcro band to secure it to your car. Choose one of the two methods:
A) If there is no space or it's too narrow between the Headrest and Seat Back, attach the Velcro to the back of the Seat Back.
B) If there is enough space between the Headrest and Seat Back, pass the band through the space and attach the Velcro to the back of the Seat Back Cover (C).

3


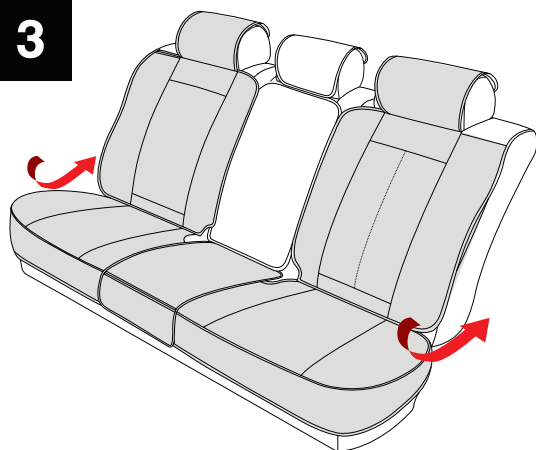


Side View

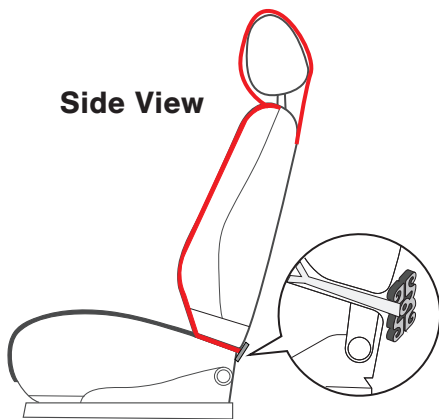

- Push the top Chuck (K) through the gap between the Seat Back and Seat Cushion.

4

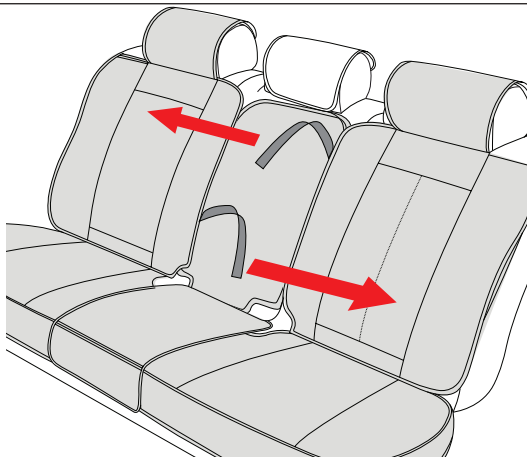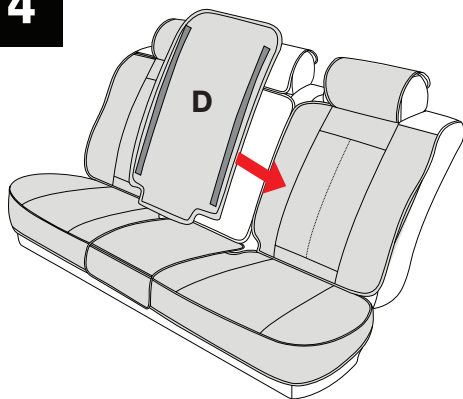


- Align Seat Back Middle Cover (D) and place it under the Seat Back Cover (C).
- Seat belt corner should be at the bottom.
- Remove Velcro cover from (D) and attach to (C).
- Press to secure firmly.

REAR SEAT COVERS

- **Seat Back Installation**


◇ Additional options for a more secure fit for Seat Style A & B

5

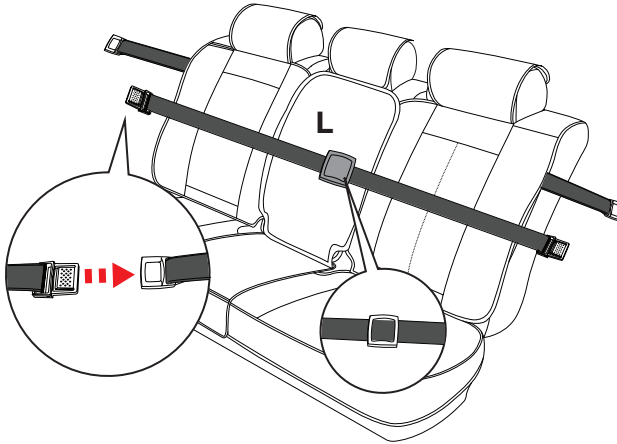

- Prepare the included Elastic Buckle (L) and connect it to the top ends of Seat Back Covers (C).
- Adjust the length using the Elastic Buckle (L)'s adjustment feature.

6

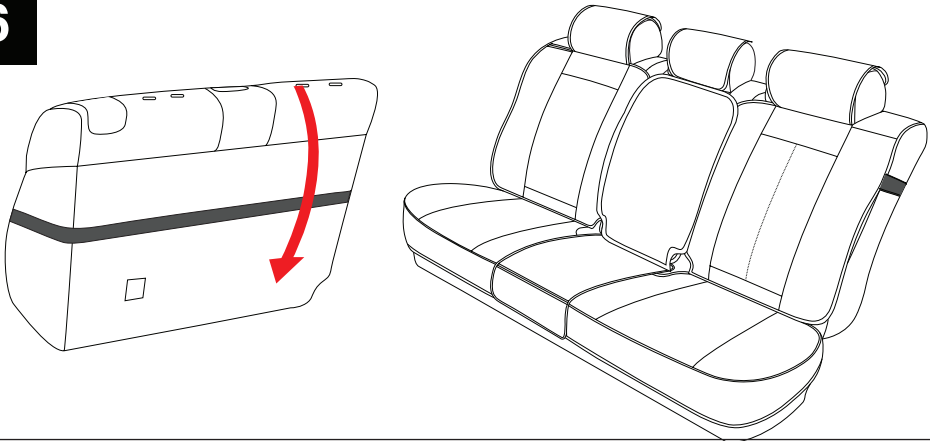


- Pass Elastic Buckle (L) over the back of the Seat Back.


REAR SEAT COVERS

• Seat Back Installation

- ◇ Additional options for a more secure fit for Seat Style C & D

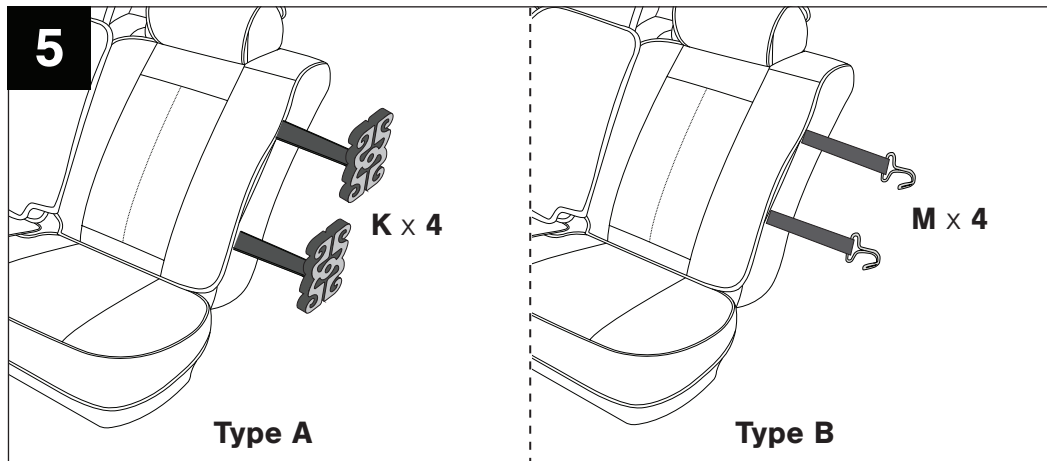

- Attach Chuck (K) or Hook (M) to the elastic bands at both ends of the Seat Back Cover (C).
- Use the part that fits your vehicle best.
- If the gap between the seat and the rear door frame is large, use Chuck (K).
- If the gap is small, use Hook (M).



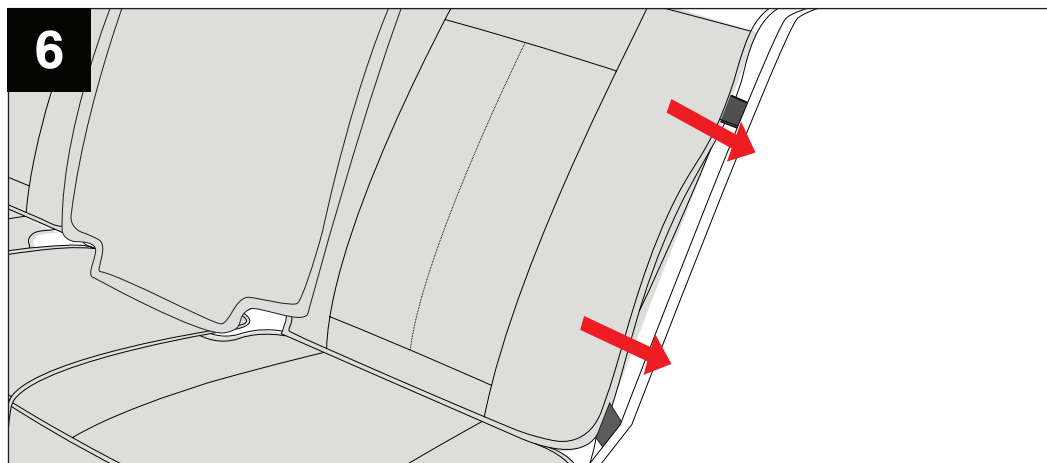


- Insert the connected (K) or (M) deeply between the seat and the rear door frame.
- Be careful not to pinch your hand between the frames.

REAR SEAT COVERS

- Headrest Installation

- ◇ Part E Installation

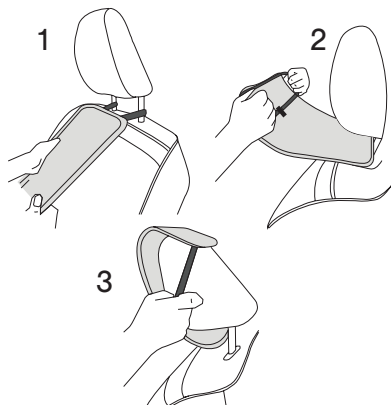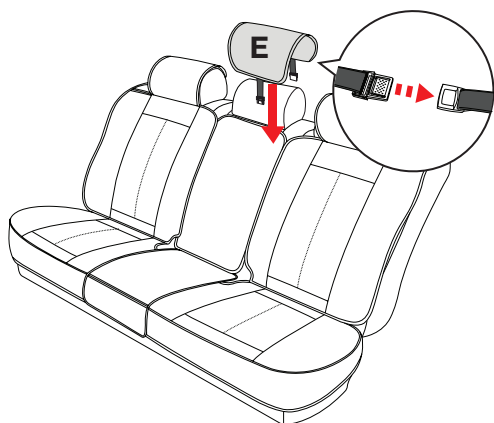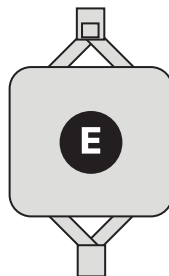

- Wrap the Headrest Middle Cover (E) and buckle it.

- If it seems too big, consider trying the alternative method on the side.

1) Attach one elastic strap to the headrest.



2) Unfold the other end with both hands.

3) Place the unfolded strap on the headrest.

REAR SEAT COVERS

- Headrest Installation

- ◇ Part F Installation

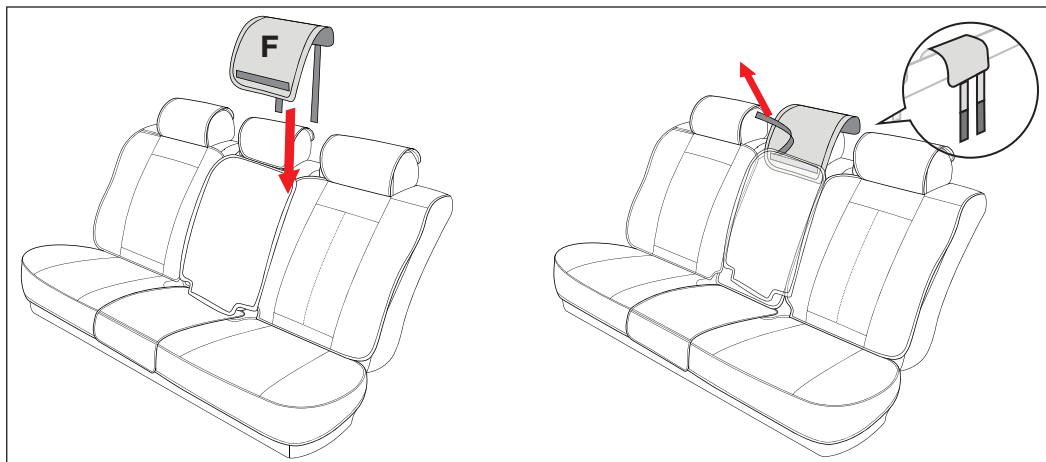

- Remove the Velcro cover from Headrest Middle Cover (F)
- Attach it to the top of Seat Back Middle Cover (D).
- Attach the Velcro band to the back of the Seat Back to secure it.

Premium Comfort Leather Seat Covers Video Installation Guide



https://www.youtube.com/playlist?list=PL_H4E-ginvwRubTtw8bFmwLQ0s6w2N3Vr